



DMT10-2-1113

DMT

LONG RANGE DISTANCE SENSORS

SICK
Sensor Intelligence.



Ordering information

Type	Part no.
DMT10-2-1113	1027605

Other models and accessories → www.sick.com/DMT



Detailed technical data

Mechanics/electronics

Supply voltage V_s	DC 18 V ... 30 V, limit values
Ripple	< 5 V _{pp} ¹⁾
Power consumption	≤ 6 W ²⁾
Initialization time	6 s
Connection type	1 x terminal connection, 1 x Sub D, 9-pin
Weight	Approx. 1,200 g
Enclosure rating	IP65
Protection class	III ³⁾

¹⁾ May not fall short of or exceed V_s tolerances.

²⁾ Without load.

³⁾ Reference voltage DC 50 V PELV-voltage (EN 50178).

Performance

Measuring range	0.5 m ... 20 m ¹⁾
Target	Natural objects
Resolution	≤ 1 mm
Repeatability	7 mm ^{2) 3)} 10 mm ^{3) 4)}
Accuracy	± 10 mm ^{5) 6)}
Response time	1 ms ... 4,000 ms ⁷⁾
Measurement cycle time	0.977 ms

¹⁾ Max. object temperature 1,400 °C.

²⁾ Dependent on distance and remission, 7 mm, at 6% ... 90% remission from 0.5 m ... 65 m, at 6% ... 18% remission from 0.5 m ... 40 m, at 6% remission from 0.5 m ... 15 m.

³⁾ Environmental conditions constant, min. warm-up time 30 min, average depth 1,024, statistical error 1 σ.

⁴⁾ Dependent on distance and remission, 10 mm, at 6% ... 90% remission from 60 m ... 155 m, at 6% ... 18% remission from 40 m ... 65 m, at 6% remission from 15 m ... 40 m.

⁵⁾ 23 °C air temperature, 977 hPa, min. warm-up time 30 min.

⁶⁾ When operating in ambient temperatures between +40 °C ... +55 °C the accuracy can decrease by factor 2.5.

⁷⁾ Dependent on averaging method, averaging depth, timeout, baud rate, data output, output format, and delay time.

⁸⁾ Dependent on averaging method, averaging depth, timeout, baud rate, data output, and output format.

⁹⁾ , Dependent on averaging method, averaging depth, timeout, baud rate, data output, and output format.

Average depth	1/16/64/256/1,024
Output time	1 ms ... 4,000 ms ⁸⁾
Aperture delay time	1 s ⁹⁾
Light source	Laser, infrared
Laser class	1 (IEC 60825-1:2014, EN 60825-1:2014)
Typ. light spot size (distance)	20 mm (+ 5 x distance in m)
Note	Mechanical aperture
Special characteristic	Mechanical aperture

¹⁾ Max. object temperature 1,400 °C.

²⁾ Dependent on distance and remission, 7 mm, at 6% ... 90% remission from 0.5 m ... 65 m, at 6% ... 18% remission from 0.5 m ... 40 m, at 6% remission from 0.5 m ... 15 m.

³⁾ Environmental conditions constant, min. warm-up time 30 min, average depth 1,024, statistical error 1 σ.

⁴⁾ Dependent on distance and remission, 10 mm, at 6% ... 90% remission from 60 m ... 155 m, at 6% ... 18% remission from 40 m ... 65 m, at 6% remission from 15 m ... 40 m.

⁵⁾ 23 °C air temperature, 977 hPa, min. warm-up time 30 min.

⁶⁾ When operating in ambient temperatures between +40 °C ... +55 °C the accuracy can decrease by factor 2.5.

⁷⁾ Dependent on averaging method, averaging depth, timeout, baud rate, data output, output format, and delay time.

⁸⁾ Dependent on averaging method, averaging depth, timeout, baud rate, data output, and output format.

⁹⁾ , Dependent on averaging method, averaging depth, timeout, baud rate, data output, and output format.

Interfaces

Serial		✓, RS-232, RS-422
	Remark	Switchable
	Function	Configuration (RS-232)
Digital output		
	Number	2 ¹⁾
	Type	PNP
	Maximum output current I _A	≤ 100 mA
Analog output		
	Type	Power output
	Current	4 mA ... 20 mA ²⁾

¹⁾ Output Q short-circuit protected.

²⁾ Scalable.

Ambient data

Electromagnetic compatibility (EMC)	EN 55011:1998 Kl. B, Gr.1 EN 61000-6-2
Ambient temperature operation	-10 °C ... +55 °C -10 °C ... +75 °C, operation with cooling case
Ambient storage temperature	-25 °C ... +75 °C
Temperature drift	Typ. 0.6 mm/K ¹⁾ Typ. 0.3 mm/K ²⁾
Mechanical load	Shock: (IEC 60068-2-27, -2-29) Sine: (IEC 60068-2-6)

¹⁾ -10 °C ... 0 °C, +40 °C ... +55 °C.


²⁾ 0 °C ... +40 °C.

Classifications

ECl@ss 5.0	27270801
ECl@ss 5.1.4	27270801
ECl@ss 6.0	27270801
ECl@ss 6.2	27270801
ECl@ss 7.0	27270801
ECl@ss 8.0	27270801
ECl@ss 8.1	27270801
ECl@ss 9.0	27270801
ETIM 5.0	EC001825
ETIM 6.0	EC001825
UNSPSC 16.0901	41111613


Dimensional drawing (Dimensions in mm (inch))

DMT10-2-x1xx DML40-2-x1xx

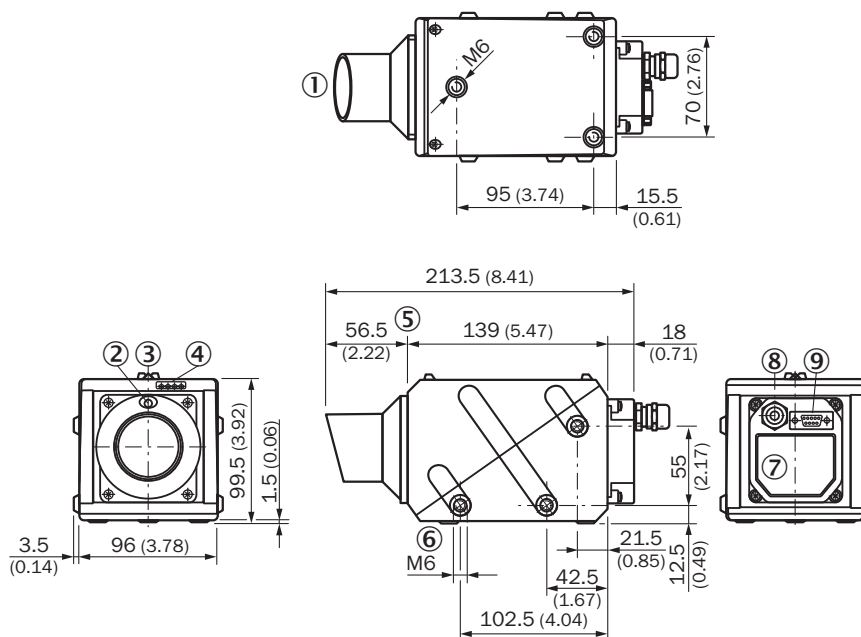


Connection type

RS-232/RS-422 connection type



- ① Pin 1
- ⑤ Pin 5
- ⑥ Pin 6
- ⑨ Pin 9


Connection type DMxxx-2 RS232/RS-422, PG9

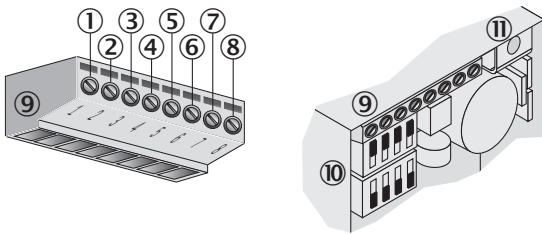



- ① Pin 1
- ② Pin 2
- ③ Pin 3
- ④ Pin 4
- ⑤ Pin 5
- ⑥ Pin 6
- ⑦ Pin 7
- ⑧ Pin 8
- ⑨ Terminals
- ⑩ DIP switches RS-232-/RS-422 switching
- ⑪ Shield

Connection diagram


RS-232/RS-422 connection diagram

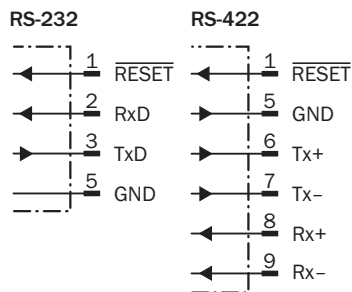

Connection diagram DMxxx-2 RS232/RS-422, PG9

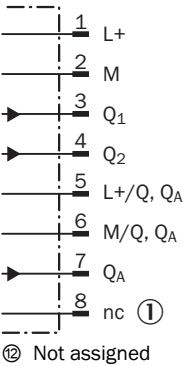

Adjustment possible

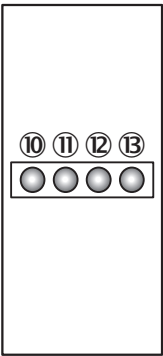


- ⑩ Q2 function indicator
- ⑪ Q1 function indicator
- ⑫ Operating indicator, green
- ⑬ Plausibility (measurement error) red

Recommended accessories

Other models and accessories → www.sick.com/DMT

	Brief description	Type	Part no.
Terminal and alignment brackets			
	Alignment unit for DMT/DML, incl. mounting material, steel, zinc coated, mounting hardware included	BEF-GH-DME	5309130

	Brief description	Type	Part no.
Plug connectors and cables			
	Head A: female connector, D-Sub, 9-pin, straight Head B: Flying leads Cable: serial, unshielded, 3 m	YFDSA9-030XXXXLEBX	2020319

Recommended services

Additional services → www.sick.com/DMT

	Type	Part no.
Warranty extensions		
<ul style="list-style-type: none"> • Product area: Identification solutions, Vision, Distance sensors, Detection and ranging solutions • Range of services: The services correspond to the scope of the statutory manufacturer warranty (SICK general terms and conditions of purchase), Long-term protection for calculable lump sum. • Duration: Five-year warranty from date of purchase. 	Five-year extended warranty	1680671

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com