



# DFS60B-S1AA02000

DFS60

INCREMENTAL ENCODERS

**SICK**  
Sensor Intelligence.



Illustration may differ



## Ordering information

| Type             | Part no. |
|------------------|----------|
| DFS60B-S1AA02000 | 1037198  |

Other models and accessories → [www.sick.com/DFS60](http://www.sick.com/DFS60)

## Detailed technical data

### Performance

|                                                               |                        |
|---------------------------------------------------------------|------------------------|
| <b>Pulses per revolution</b>                                  | 2,000                  |
| <b>Measuring step</b>                                         | 90° electronically/ppr |
| <b>Measuring step deviation at non binary number of lines</b> | ± 0.01°                |
| <b>Error limits</b>                                           | ± 0.05°                |
| <b>Initialization time</b>                                    | 40 ms                  |

### Interfaces

|                                       |              |
|---------------------------------------|--------------|
| <b>Communication interface</b>        | Incremental  |
| <b>Communication Interface detail</b> | TTL / RS-422 |
| <b>Number of signal channels</b>      | 6-channel    |

### Electrical data

|                                                |                                             |
|------------------------------------------------|---------------------------------------------|
| <b>Connection type</b>                         | Male connector, M23, 12-pin, radial         |
| <b>Operating current</b>                       | 40 mA                                       |
| <b>Power consumption</b>                       | ≤ 0.5 W (without load)                      |
| <b>Supply voltage</b>                          | 4.5 V ... 5.5 V                             |
| <b>Load current</b>                            | ≤ 30 mA                                     |
| <b>Output frequency</b>                        | ≤ 600 kHz                                   |
| <b>Reference signal, number</b>                | 1                                           |
| <b>Reference signal, position</b>              | 90°, electric, logically gated with A and B |
| <b>Short-circuit protection of the outputs</b> | ✓ <sup>1)</sup>                             |
| <b>MTTfd: mean time to dangerous failure</b>   | 300 years (EN ISO 13849-1) <sup>2)</sup>    |

<sup>1)</sup> Short-circuit opposite to another channel, US or GND permissible for maximum 30 s.

<sup>2)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

## Mechanical data

|                                               |                                          |
|-----------------------------------------------|------------------------------------------|
| <b>Mechanical design</b>                      | Solid shaft, Servo flange                |
| <b>Shaft diameter</b>                         | 6 mm                                     |
| <b>Wave length</b>                            | 10 mm                                    |
| <b>Weight</b>                                 | 0.3 kg                                   |
| <b>Flange material</b>                        | Aluminum                                 |
| <b>Housing material</b>                       | Aluminum die cast                        |
| <b>Start up torque</b>                        | 0.5 Ncm (+20 °C)                         |
| <b>Operating torque</b>                       | 0.3 Ncm (+20 °C)                         |
| <b>Permissible shaft loading radial/axial</b> | 80 N (radial)<br>40 N (axial)            |
| <b>Operating speed</b>                        | $\leq 9,000 \text{ min}^{-1} \text{ }^1$ |
| <b>Moment of inertia of the rotor</b>         | 6.2 gcm <sup>2</sup>                     |
| <b>Bearing lifetime</b>                       | 3.6 x 10 <sup>10</sup> revolutions       |
| <b>Angular acceleration</b>                   | $\leq 500,000 \text{ rad/s}^2$           |

<sup>1)</sup> Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

## Ambient data

|                                      |                                                                                                                                   |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>EMC</b>                           | According to EN 61000-6-2 and EN 61000-6-3                                                                                        |
| <b>Enclosure rating</b>              | IP67, housing side, male connector connection (according to IEC 60529) <sup>1)</sup><br>IP65, shaft side (according to IEC 60529) |
| <b>Permissible relative humidity</b> | 90 % (condensation of the optical scanning not permitted)                                                                         |
| <b>Operating temperature range</b>   | -40 °C ... +100 °C <sup>2)</sup><br>-30 °C ... +100 °C <sup>3)</sup>                                                              |
| <b>Storage temperature range</b>     | -40 °C ... +100 °C, without package                                                                                               |
| <b>Resistance to shocks</b>          | 70 g, 6 ms (according to EN 60068-2-27)                                                                                           |
| <b>Resistance to vibration</b>       | 30 g, 10 Hz ... 2,000 Hz (according to EN 60068-2-6)                                                                              |

<sup>1)</sup> With mating connector fitted.

<sup>2)</sup> Stationary position of the cable.


<sup>3)</sup> Flexible position of the cable.

## Classifications

|                       |          |
|-----------------------|----------|
| <b>ECI@ss 5.0</b>     | 27270501 |
| <b>ECI@ss 5.1.4</b>   | 27270501 |
| <b>ECI@ss 6.0</b>     | 27270590 |
| <b>ECI@ss 6.2</b>     | 27270590 |
| <b>ECI@ss 7.0</b>     | 27270501 |
| <b>ECI@ss 8.0</b>     | 27270501 |
| <b>ECI@ss 8.1</b>     | 27270501 |
| <b>ECI@ss 9.0</b>     | 27270501 |
| <b>ETIM 5.0</b>       | EC001486 |
| <b>ETIM 6.0</b>       | EC001486 |
| <b>UNSPSC 16.0901</b> | 41112113 |

### Dimensional drawing (Dimensions in mm (inch))


Servo flange, radial plug connection M12 and M23

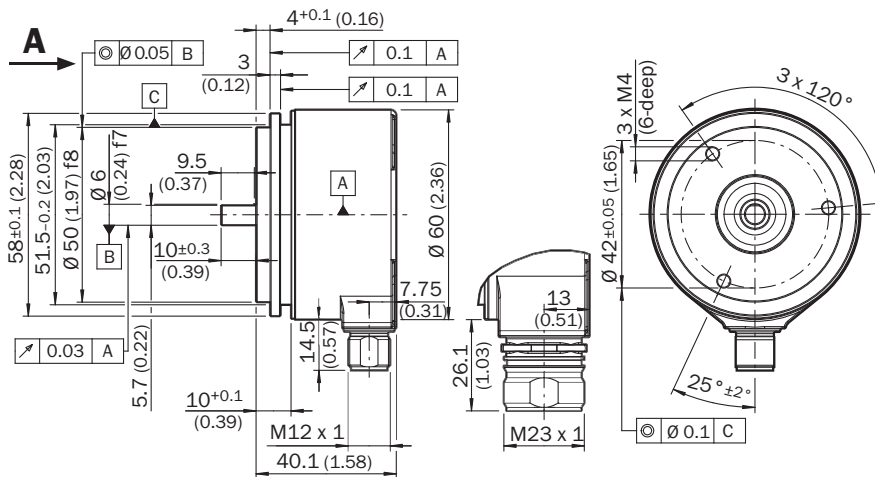

General tolerances according to DIN ISO 2768-mk


### Proposed fitting

Proposed customer fitting for servo clamp small

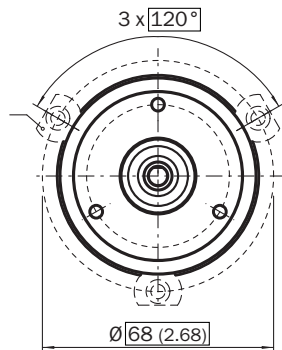

All dimensions in mm (inch)

Proposed customer fitting for servo clamp half-shell

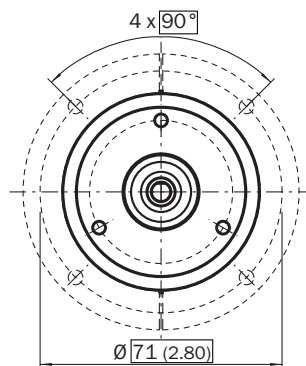


All dimensions in mm (inch)


## PIN assignment

## Cable, 8-wire

View of M12 male device connector on encoder



View of M23 male device connector on encoder




| PIN, 8-pin, M12 male connector | PIN, 12-pin, M23 male connector | Color of the wires for encoders with cable outlet | TTL/HTL signal      | Sin/cos 1.0 V <sub>ss</sub> | Explanation                                                                          |
|--------------------------------|---------------------------------|---------------------------------------------------|---------------------|-----------------------------|--------------------------------------------------------------------------------------|
| 1                              | 6                               | Brown                                             | $\overline{A}$      | COS-                        | Signal wire                                                                          |
| 2                              | 5                               | White                                             | A                   | COS+                        | Signal wire                                                                          |
| 3                              | 1                               | Black                                             | $\overline{B}$      | SIN-                        | Signal wire                                                                          |
| 4                              | 8                               | Pink                                              | B                   | SIN+                        | Signal wire                                                                          |
| 5                              | 4                               | Yellow                                            | $\overline{Z}$      | $\overline{Z}$              | Signal wire                                                                          |
| 6                              | 3                               | Violet                                            | Z                   | Z                           | Signal wire                                                                          |
| 7                              | 10                              | Blue                                              | GND                 | GND                         | Ground connection of the encoder                                                     |
| 8                              | 12                              | Red                                               | +U <sub>s</sub>     | +U <sub>s</sub>             | Supply voltage (volt-free to housing)                                                |
| -                              | 9                               | -                                                 | n.c.                | n.c.                        | Not assigned                                                                         |
| -                              | 2                               | -                                                 | n.c.                | n.c.                        | Not assigned                                                                         |
| -                              | 11                              | -                                                 | n.c.                | n.c.                        | Not assigned                                                                         |
| -                              | 7 <sup>1)</sup>                 | -                                                 | 0-SET <sup>1)</sup> | n.c.                        | Set zero pulse <sup>1)</sup>                                                         |
| Screen                         | Screen                          | Screen                                            | Screen              | Screen                      | Screen connected to housing on encoder side.<br>Connected to ground on control side. |

<sup>1)</sup> For electrical interfaces only: M, U, V, W with 0-SET function on PIN 7 on M23 male connector. The 0-SET input is used to set the zero pulse on the current shaft position. If the 0-SET input is connected to U<sub>s</sub> for longer than 250 ms after it had previously been unassigned for at least 1,000 ms or had been connected to the GND, the current position of the shaft is assigned to the zero pulse signal "Z".


## Maximum revolution range

Maximum revolution range

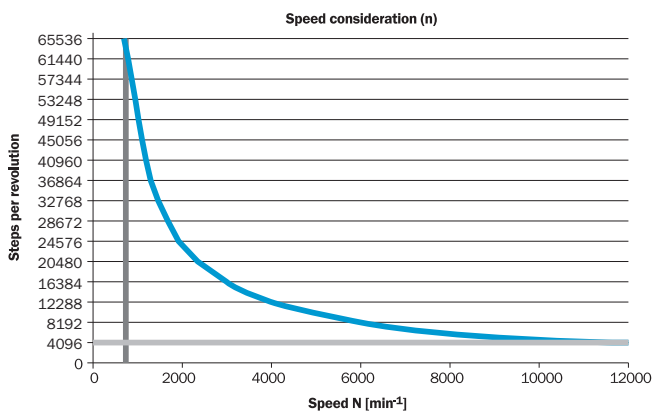

## Signal outputs

Signal outputs

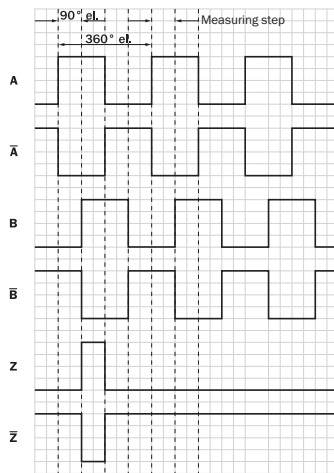

CW with view on the encoder shaft in direction "A", compare dimensional drawing.

| Supply voltage  | Output |
|-----------------|--------|
| 4,5 V ... 5,5 V | TTL    |
| 10 V ... 32 V   | TTL    |
| 10 V ... 32 V   | HTL    |

## Recommended accessories

Other models and accessories → [www.sick.com/DFS60](http://www.sick.com/DFS60)

|                            | Brief description                                                                                     | Type           | Part no. |
|----------------------------|-------------------------------------------------------------------------------------------------------|----------------|----------|
| Other mounting accessories |                                                                                                       |                |          |
|                            | Aluminium measuring wheel with O-ring (NBR70) for 6 mm solid shaft, circumference 200 mm              | BEF-MR006020R  | 2055222  |
|                            | Measuring wheel with O-ring (NBR70) for 6 mm solid shaft, circumference 300 mm                        | BEF-MR006030R  | 2055634  |
|                            | Aluminium measuring wheel with O-ring (NBR70) for 6 mm solid shaft, circumference 500 mm              | BEF-MR006050R  | 2055225  |
|                            | Aluminum measuring wheel with cross-knurled surface for 6 mm solid shaft, circumference 200 mm        | BEF-MR06200AK  | 4084745  |
|                            | Aluminum measuring wheel with smooth polyurethane surface for 6 mm solid shaft, circumference 200 mm  | BEF-MR06200AP  | 4084746  |
|                            | Aluminum measuring wheel with ridged polyurethane surface for 6 mm solid shaft, circumference 200 mm  | BEF-MR06200APG | 4084748  |
|                            | Aluminum measuring wheel with studded polyurethane surface for 6 mm solid shaft, circumference 200 mm | BEF-MR06200APN | 4084747  |

|                                                                                     | Brief description                                                                                                                                                                                                                                                                                                                                                                                        | Type             | Part no. |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------|
|    | Mounting bell for encoder with servo flange, 50 mm spigot, mounting kit included                                                                                                                                                                                                                                                                                                                         | BEF-MG-50        | 5312987  |
|    | Bearing block for servo and face mount flange encoder. The heavy-duty bearing block is used to absorb very large radial and axial shaft loads. Particularly when using belt pulleys, chain sprockets, friction wheels. Operating speed max. 4,000 rpm <sup>-1</sup> , axial shaft load 150 N, radial shaft load 250 N, bearing service life 3.6 x 10 <sup>9</sup> revolutions                            | BEF-FA-LB1210    | 2044591  |
|                                                                                     | Mounting kit for servo flange encoder on the bearing block, 1 bar coupling SKPS 1520 06/06 1 hexagon socket wrench SW1.5 DIN 911, 3 mounting eccentric BEMN 1242 49 3 screws M4 x 10 DIN 912, 1 hexagon socket wrench SW3 DIN 911, 1 bar coupling SKPS 1520 06/06 1 hexagon socket wrench SW1.5 DIN 911, 3 mounting eccentric BEMN 1242 49 3 screws M4 x 10 DIN 912, 1 hexagon socket wrench SW3 DIN 911 | BEF-MK-LB        | 5320872  |
|    | Servo clamps, large, for servo flanges (clamps, eccentric fastener), 3 pcs., without mounting material, without mounting hardware                                                                                                                                                                                                                                                                        | BEF-WK-SF        | 2029166  |
| Shaft adaptation                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                          |                  |          |
|    | Bellows coupling, shaft diameter 6 mm / 6 mm, maximum shaft offset: radial $\pm 0.25$ mm, axial $\pm 0.4$ mm, angular $\pm 4^\circ$ ; max. speed 10,000 rpm, $-30^\circ\text{C}$ to $+120^\circ\text{C}$ , max. torque 80 Ncm; material: stainless steel bellows, aluminum hub                                                                                                                           | KUP-0606-B       | 5312981  |
|    | Bar coupling, shaft diameter 6 mm / 6 mm, maximum shaft offset: radial $\pm 0.3$ mm, axial $\pm 0.2$ mm, angle $\pm 3^\circ$ ; max. speed 10,000 rpm, $-10^\circ$ to $+80^\circ\text{C}$ , max. torque 80 Ncm; material: fiber-glass reinforced polyamide, aluminum hub                                                                                                                                  | KUP-0606-S       | 2056406  |
|                                                                                     | Bar coupling, shaft diameter 6 mm / 8 mm, maximum shaft offset radial $\pm 0.3$ mm, axial $\pm 0.2$ mm, angle $\pm 3^\circ$ , max. speed 10,000 rpm, torsion spring rigidity 38 Nm/wheel; material: fiber-glass reinforced polyamide, aluminum hub                                                                                                                                                       | KUP-0608-S       | 5314179  |
|  | Bellows coupling, shaft diameter 6 mm / 10 mm, maximum shaft offset: radial $\pm 0.25$ mm, axial $\pm 0.4$ mm, angular $\pm 4^\circ$ ; max. speed 10,000 rpm, $-30^\circ\text{C}$ to $+120^\circ\text{C}$ , max. torque 80 Ncm; material: stainless steel bellows, aluminum hub                                                                                                                          | KUP-0610-B       | 5312982  |
|  | Double loop coupling, shaft diameter 6 mm / 10 mm, max. shaft offset: radially $\pm 2.5$ mm, axially $\pm 3$ mm, angle $\pm 10$ degrees; max. speed 3,000 rpm, $-30$ to $+80$ degrees Celsius, torsional spring stiffness of 25 Nm/rad                                                                                                                                                                   | KUP-0610-D       | 5326697  |
|  | Spring washer coupling, shaft diameter 6 mm / 10 mm, Maximum shaft offset: radial $\pm 0.3$ mm, axial $\pm 0.4$ mm, angular $\pm 2.5^\circ$ ; max. speed 12,000 rpm, $-10^\circ$ to $+80^\circ\text{C}$ , max. torque 60 Ncm; material: aluminum flange, glass fiber-reinforced polyamide membrane and hardened steel coupling pin                                                                       | KUP-0610-F       | 5312985  |
|  | Bar coupling, shaft diameter 6 mm / 10 mm, max. shaft offset: radial $\pm 0.3$ mm, axial $\pm 0.3$ mm, angular $\pm 3^\circ$ ; max. speed 10,000 rpm, $-10^\circ$ to $+80^\circ\text{C}$ , max. torque: 80 Ncm, material: fiber-glass reinforced polyamide, aluminum hub                                                                                                                                 | KUP-0610-S       | 2056407  |
| Plug connectors and cables                                                          |                                                                                                                                                                                                                                                                                                                                                                                                          |                  |          |
|  | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, shielded, 2 m                                                                                                                                                                                                                                                                                        | DOL-2312-G02MLA3 | 2030682  |
|  | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, halogen-free, shielded, 3 m                                                                                                                                                                                                                                                                          | DOL-2312-G03MMA3 | 2029213  |
|                                                                                     | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, halogen-free, shielded, 5 m                                                                                                                                                                                                                                                                          | DOL-2312-G05MMA3 | 2029214  |
|  | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, shielded, 7 m                                                                                                                                                                                                                                                                                        | DOL-2312-G07MLA3 | 2030685  |
|                                                                                     | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, shielded, 10 m                                                                                                                                                                                                                                                                                       | DOL-2312-G10MLA3 | 2030688  |

|                                                                                     | Brief description                                                                                                                 | Type             | Part no. |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|------------------|----------|
|    | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, halogen-free, shielded, 10 m  | DOL-2312-G10MMA3 | 2029215  |
|    | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, shielded, 15 m                | DOL-2312-G15MLA3 | 2030692  |
|    | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, halogen-free, shielded, 1.5 m | DOL-2312-G1M5MA3 | 2029212  |
|    | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, shielded, 20 m                | DOL-2312-G20MLA3 | 2030695  |
|    | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, halogen-free, shielded, 20 m  | DOL-2312-G20MMA3 | 2029216  |
|    | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, shielded, 25 m                | DOL-2312-G25MLA3 | 2030699  |
|                                                                                     | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, shielded, 30 m                | DOL-2312-G30MLA3 | 2030702  |
|    | Head A: female connector, M23, 12-pin, straight<br>Head B: Flying leads<br>Cable: Incremental, PUR, halogen-free, shielded, 30 m  | DOL-2312-G30MMA3 | 2029217  |
|   | Head A: female connector, M23, 12-pin, straight<br>Head B: -<br>Cable: HIPERFACE®, SSI, Incremental, shielded                     | DOS-2312-G02     | 2077057  |
|  | Head A: female connector, M23, 12-pin, angled<br>Head B: -<br>Cable: HIPERFACE®, SSI, Incremental, shielded                       | DOS-2312-W01     | 2072580  |



## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)